
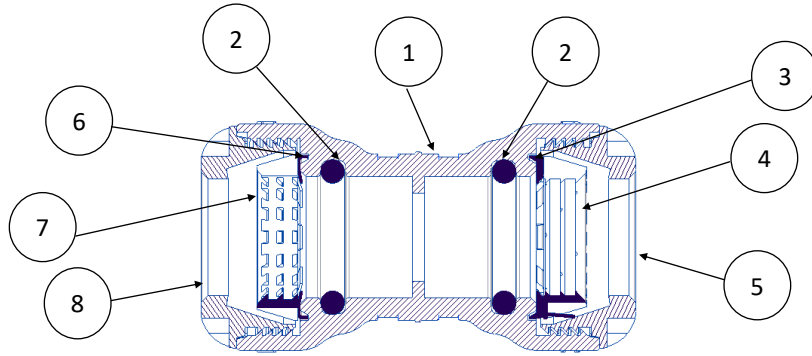


SUBMITTAL INFORMATION

FULL BORE COUPLING: 118-C_X_

Megatite Coupling-Push Fit-Poly x Copper Tubing

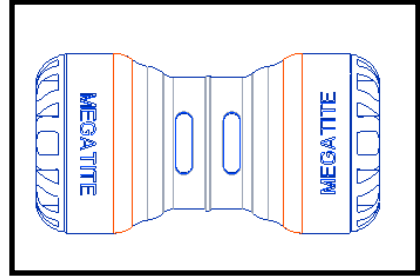

PARTS AND MATERIAL:

- 1. BODY: NYLON COMPOSITE NSF 61 APPROVED
- 2. O-RING: NBR RUBBER NSF 61 APPROVED
- 3. RETAINING RING: PLASTIC
- 4. GRIPPER: PLASTIC
- 5. NUT: NYLON COMPOSITE
- 6. RETAINING RING: 304 STAINLESS STEEL
- 7. GRIPPER : 304 STAINLESS STEEL
- 8. NUT: NYLON COMPOSITE

FEATURES:

- PUSH-FIT POSITIVE STOP CONNECTION FOR ALL COPPER SIZE PLASTIC PIPE AND TUBING TYPE 'K' (NO WRENCH NEEDED)
- FULL FLOW WATERWAY
- HEAVY CROSS SECTION PATTERN DESIGNED TO WITHSTAND THE TOUGHNESS REQUIRED ON A CONTRACTOR JOBSITE
- DESIGNED FOR ALL NORTH AMERICAN CLIMATES
- 300 PSI WORKING PRESSURE

Size	Catalog No.	Megatite	Megatite	Length		Approx Wt. LBS
3/4"	118-C3X3	3/4"	3/4"	4"		
1"	118-C4X4	1"	1"	4 1/4"		
1" X 3/4"	118-C4X3	1"	3/4"	4 3/16"		
3/4" X 1"	118-C3X4	3/4"	1"	4 3/16"		



Utility Supply Corp.
43 Mcbrine Place

Submitted by: