
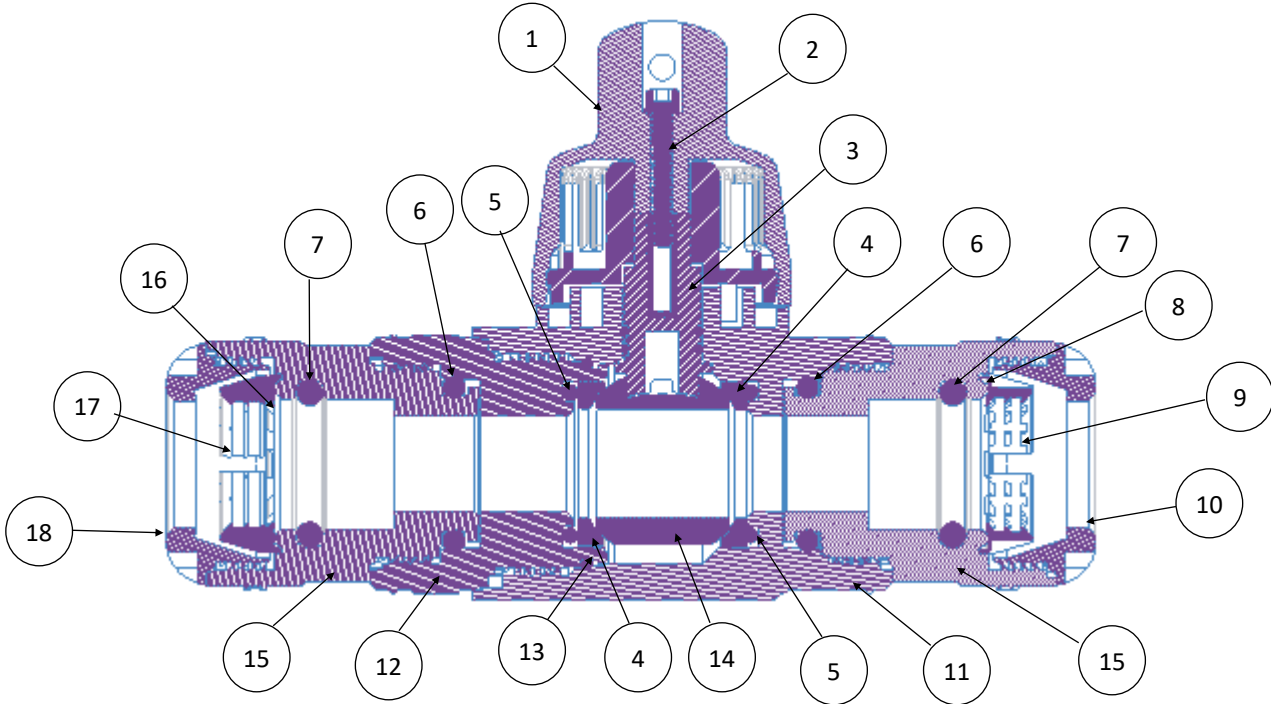


SUBMITTAL INFORMATION

Straight Ball Service Valves: 210-X_C_

Megatite Ballvalves-Push Fit-Plastic x Copper Pipe

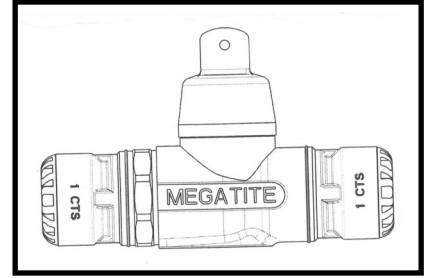

PARTS AND MATERIAL:

1. CAP: NYLON COMPOSITE
2. SCREW AND WASHER: 304 STAINLESS STEEL
3. STEM W/ O-RINGS: NYLON WITH NBR RUBBER NSF-61 APPROVED
4. BALL VALVE SEAT: PLASTIC NSF-61 APPROVED
5. O-RING: NBR RUBBER NSF-61 APPROVED
6. O-RING: NBR RUBBER NSF-61 APPROVED
7. O-RING: NBR RUBBER NSF-61 APPROVED
8. RETAINING RING: 304 STAINLESS STEEL
9. GRIPPER: 304 STAINLESS STEEL
10. NUT: NYLON COMPOSITE (GOLD COLOR)
11. MEGATITE BODY: NYLON COMPOSITE NSF-61 APPROVED
12. Ball valve END BODY: NYLON COMPOSITE NSF-61 APPROVED
13. O-RING: NBR RUBBER NSF-61 APPROVED
14. BALL: PLASTIC NSF-61 APPROVED
15. BODY: NYLON COMPOSITE NSF-61 APPROVED
16. RETAINING RING: PLASTIC
17. GRIPPER: PLASTIC
18. NUT: NYLON COMPOSITE (BLUE COLOR)

FEATURES:

- PUSH-FIT POSITIVE STOP CONNECTION FOR ALL COPPER TUBING TYPE 'K' (NO WRENCH NEEDED)
- FULL FLOW WATERWAY
- ENGINEERED FLAT BOTTOM DESIGN ALLOWS FOR PROPER NESTING OF VALVE
- HEAVY CROSS SECTION PATTERN DESIGNED TO WITHSTAND THE TOUGHNESS REQUIRED ON A CONTRACTOR JOBSITE
- DESIGNED FOR ALL NORTH AMERICAN CLIMATES
- 300 PSI WORKING PRESSURE

Valve Size	Catalog No.	Megatite	Megatite	Length	Height	Approx Wt. LBS
3/4"	210-X3C3	3/4"	3/4"	12 1/2"	5 1/2"	
1"	210-X4C4	1"	1"	12 1/2"	5 1/2"	
1" x 3/4"	210-X4C3	1"	3/4"	12 1/2"	5 1/2"	
1" x 3/4"	210-C4X3	1"	3/4"	12 1/2"	5 1/2"	



Utility Supply Corp.
 43 Mcbrine Place
 Kitchener, Ontario
 Tel; 855-748-4300
 Fax; 866-615-0561
 WWW:.usccanada.com

Submitted by: