


REVISIONS			
REV.	ECN NO.	DATE	APP'D
00		07/25/2016	

**NOTES:**  
 1. WIRE SHOWN AWAY FROM PIPE FOR CLARITY, WIRE SHALL BE INSTALLED ON THE BOTTOM SIDE OF THE PIPE BELOW THE SPRING LINE. THE WIRE SHALL BE FASTENED TO THE PIPE WITH TAPE OR PLASTIC TIES AT 5' INTERVALS.

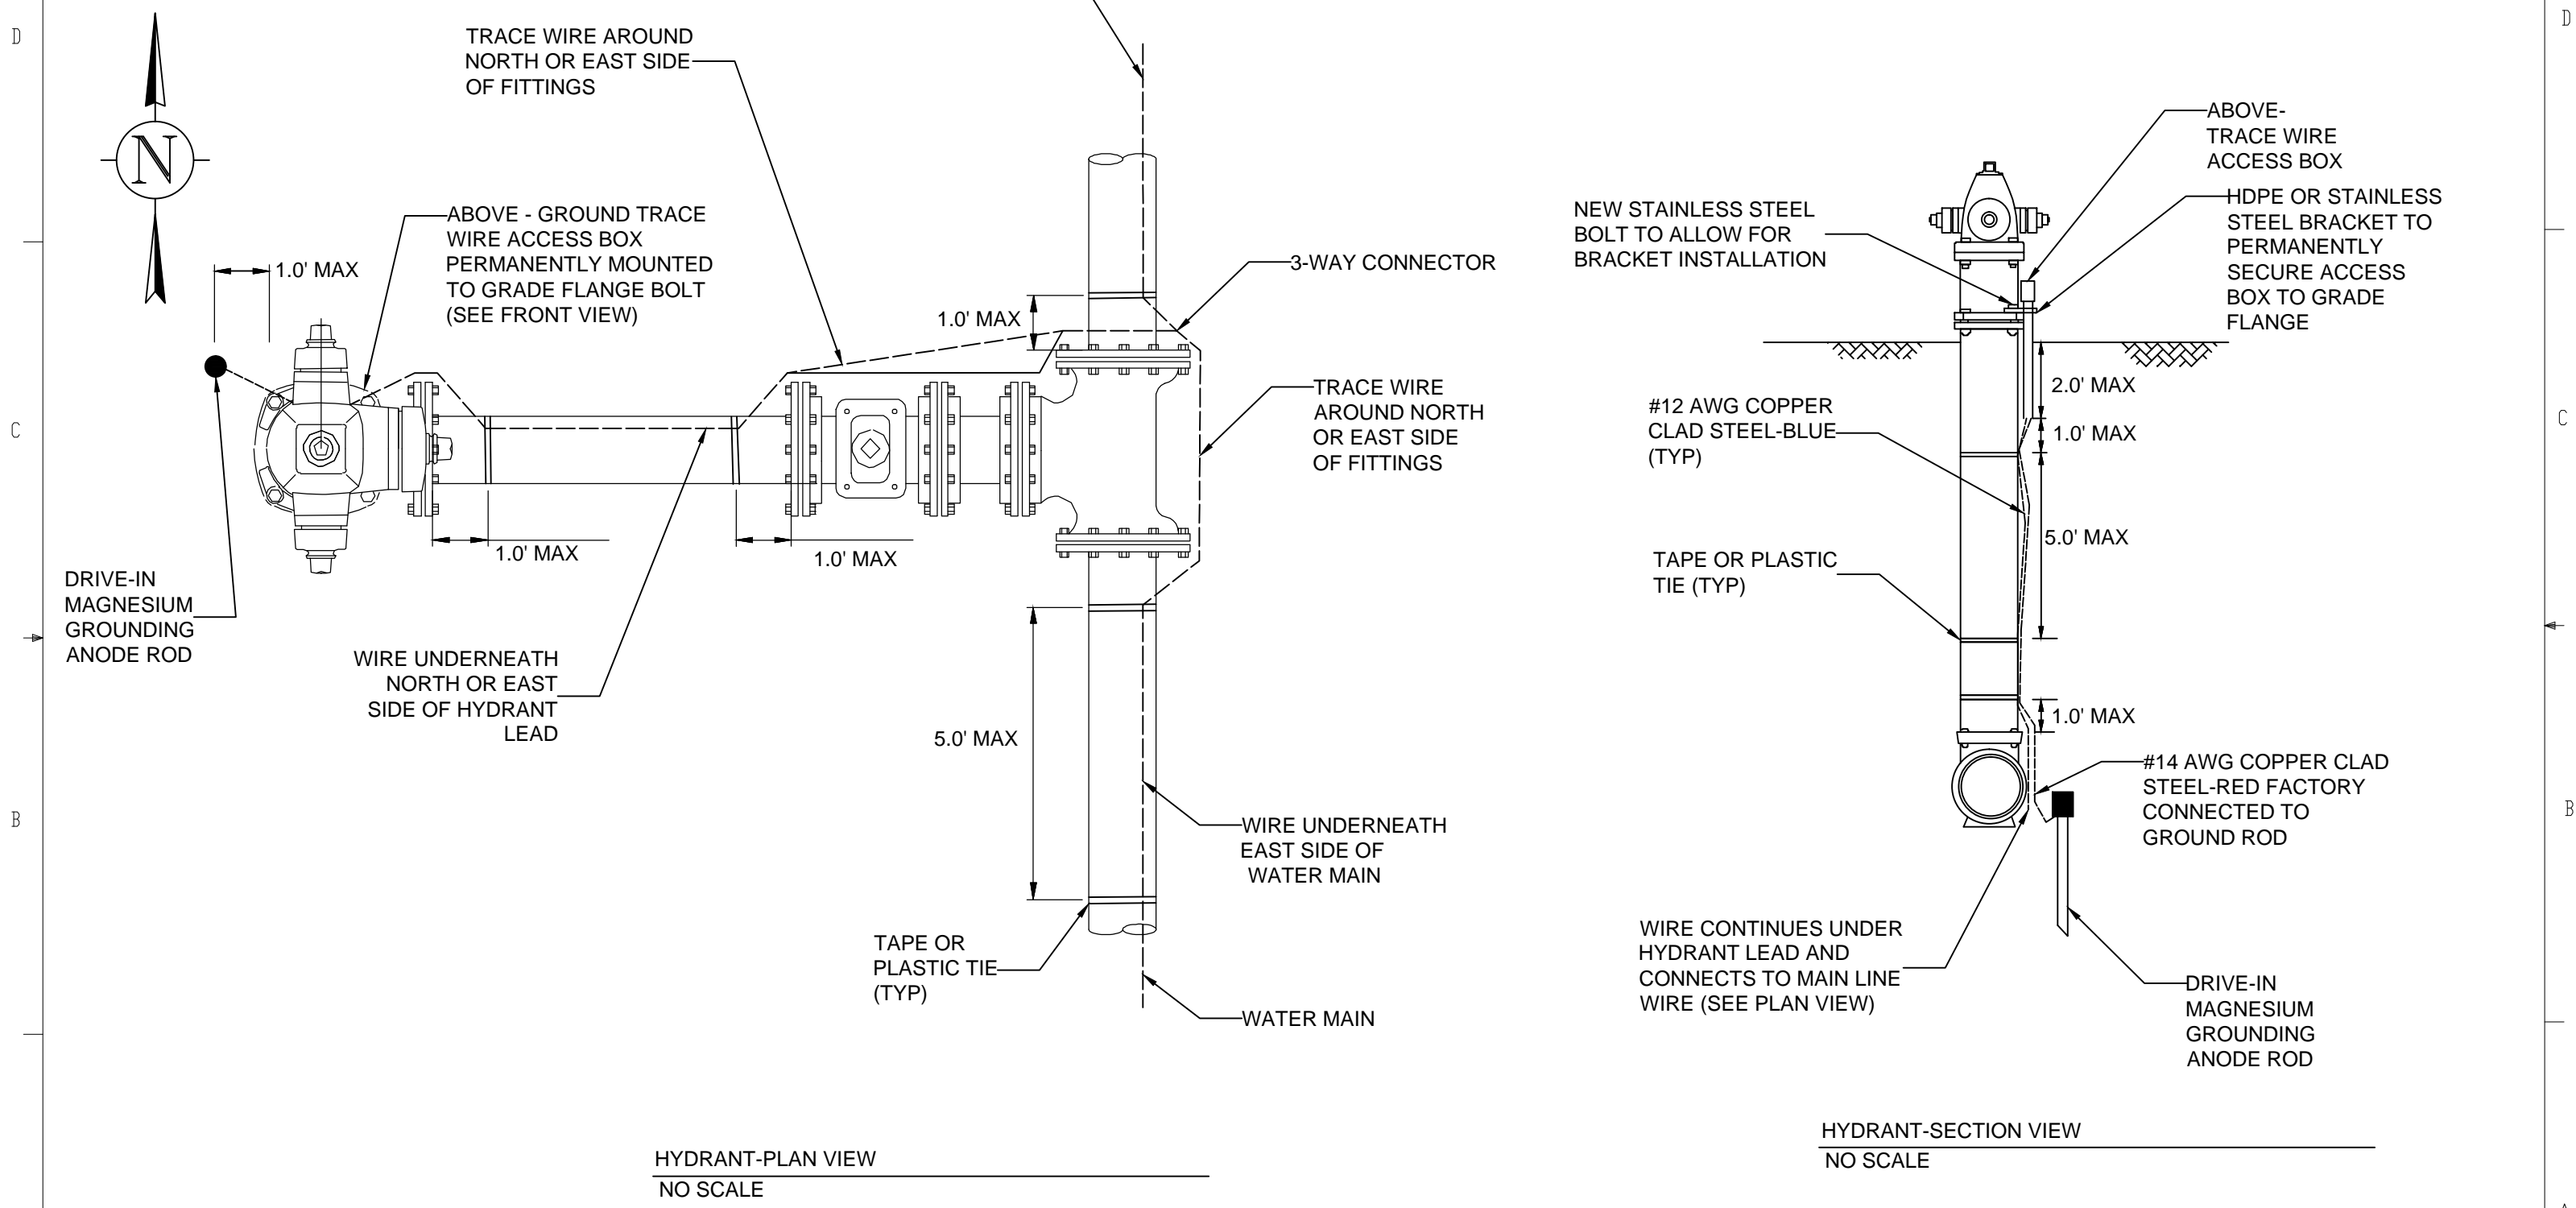

DIMENSIONS IN INCHES		TITLE <b>TRACE WIRE HYDRANT DETAIL</b>						
TOLERANCES EXCEPT AS NOTED:		DWN BY	DATE	PAGE	SCALE	SIZE	NUMBER	REV
FRACTIONS ± 1/32		CAD	08-04-2016	1 OF 1	1:1	B	xx-xxx	00
X.XX ± 0.016								
X.XXX ± 0.005								
ANGLES ± 0°30'								