




PIPE BURST CONNECTORS

APPLICATION

Pipe Burst Connectors are used to splice and run service lines off of tracer wire in pipe bursting applications. The In-line Splice and Three-way block connectors work well with Copperhead's SoloShot™ Xtreme and 3/16 stainless steel cable.



*In-line Splice
SC-PB-01*

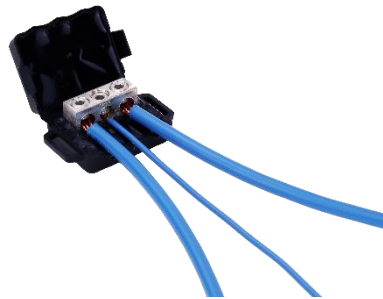

*Three-way
SC-3WPB*

SC-PB-01

*Pipe Burst Connector – In-line Splice
Qty. 1*

SC-3WPB

*Pipe Burst Connector – Three-way
Qty. 1*

FEATURES AND BENEFITS

- Designed for direct bury
- Suitable for connecting multiple wire sizes
- Pre-filled dielectric gel
- Weather resistant
- Easy installation
- Applicable in all markets including water/sewer, gas and telecom

In-line Splice	Three-way
Solid brass lug Fast curing heat shrink creates weather resistant connection Set screw thread pitch allows tighter securing of wires #18 - #8 AWG (including SoloShot™ Xtreme tracer wire) Max voltage: 30V Wire type: copper-clad steel; solid and stranded copper	Tin plated copper alloy Gel helps prevent corrosion ¼-20 slotted stainless steel set screws Waterproof and corrosion proof #14 - #6 AWG (including SoloShot™ Xtreme tracer wire) Max voltage: 600V Wire type: copper-clad steel; solid and stranded copper

